


ADDONICS TECHNOLOGIES

Model: AD5SAPM

Installation Guide

Front View

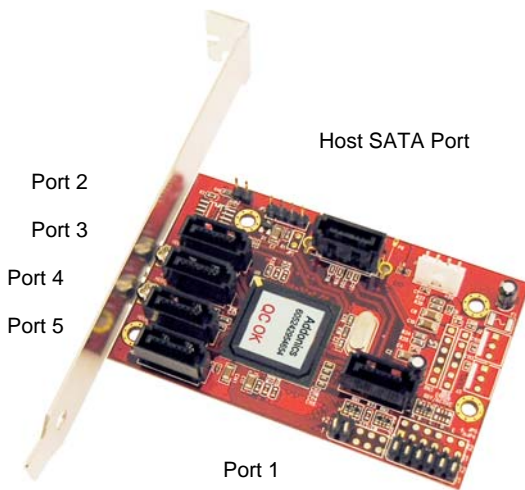

Note: When the internal port multiplier (PM) is connected to a SATA Host controller with SiI3124 or SiI3132 chip, in the RAID BIOS of the host controller, you will only see one drive and that is the drive connected to port 1 on the hardware PM.


All the SATA drives connected to the PM will show in the SATARAID5 Array Manager.

1. Mount the internal SATA Port Multiplier onto the PCI bracket of any standard desktop or low profile system.
2. Attach the SATA hard drives (up to 5) to ports 1-5 on the Port Multiplier using SATA cables.
3. Attach a 4-pin floppy power cable from the power supply unit to the Port Multiplier power connector.
4. Connect a SATA cable to the Host SATA port of the Port Multiplier then to the SATA port of the raid controller.


Ports 1-5: SATA ports where the SATA drives are connected

SATA Port: Connect to a SATA host controller which is Port Multiplier compatible

Side View

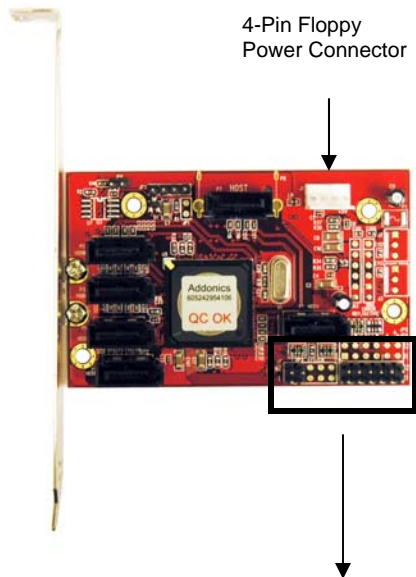

Jumper LED connections



LED KEY

0 - 4 Power and Drive Activity LED
H Host Device LED
P Power LED
S System Ready LED

TECHNICAL SUPPORT

Phone: 408 573-8580
Fax: 408 573-8588
Email: <http://www.addonics.com/sales/query/>
Internet: <http://www.addonics.com>

Technical Support (8:30 am to 6:00 pm PST)

Phone: 408 453-6212
Email: <http://www.addonics.com/support/query/>